


PVC Garden Hose

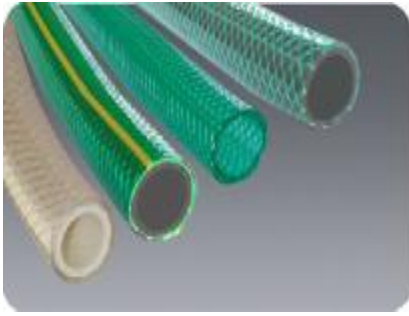

Temp. Range: -10 °C to 65°C

Applications: drawing and conveying water, oil and powder in factory, agriculture, building.

Construction:

- (1) Transparent and good cold and hot resistance.
- (2) Small bending radius and great ability of minus pressure resistance.

Part No.	size	Inner Diameter		Outer Diameter		Working pressure		Burst Pressure		Length m/coil	Weight kg/coil	Packing Size D×H(mm)	Cubage m ³
		inch	mm	inch	mm	Psi	Mpa	Psi	Mpa				
SHG1216	1/2"	0.472	12	0.630	16	116.0	0.8	348.0	2.4	100	11.5	500×190	0.047
SHG1217		0.472	12	0.669	17	116.0	0.8	348.0	2.4	7.5	1.2	260×75	0.005
		15	2.4	310×100	0.011								
		22.5	3.5	315×120	0.011								
SHG1519	5/8"	0.591	15	0.748	19	101.5	0.7	304.5	2.1	50	7.2	440×155	0.03
SHG1520					20	101.5	0.7	304.5	2.1	20	3.7	345×135	0.016
					50	9.28	405×185	0.03					
SHG1622	5/8"	0.630	16	0.866	22	101.5	0.7	304.5	2.1	7.5	1.8	330×70	0.008
										15	3.7	310×160	0.015
										22.5	5.46	350×170	0.02
										31	7.4	450×140	0.028
SHG1924	3/4"	0.748	19	0.945	24	87.0	0.6	261.0	1.8	25	5.7	380×170	0.021
		0.748	19	0.945	24	87.0	0.6	261.0	1.8	50	11.4	530×170	0.047

PVC Gas Hose



Temp. Range: -10 °C to 60°C

Applications: suitable for low pressure gas, liquid delivery, especially for household gas transportation.

Construction:

- (1) high quality PVC and rubber products, synthetic materials;
- (2) soft and flexible, safe and reliable sealing is very high.

Part No.	size	Inner Diameter		Outer Diameter		Working Pressure		Burst Pressure		Weight		Length (m/coil)
		inch	mm	inch	mm	Psi	Mpa	Psi	Mpa	lb./ft.	kg/m	
SHGA9216	3/8"	0.362	9.2	0.630	16	300	2	870	6	0.122	0.182	100
SHGA1320	1/2"	0.512	13	0.787	20	300	2	870	6	0.161	0.240	100